


Revisions			
REV:	Description	Date	Approval
A.0			

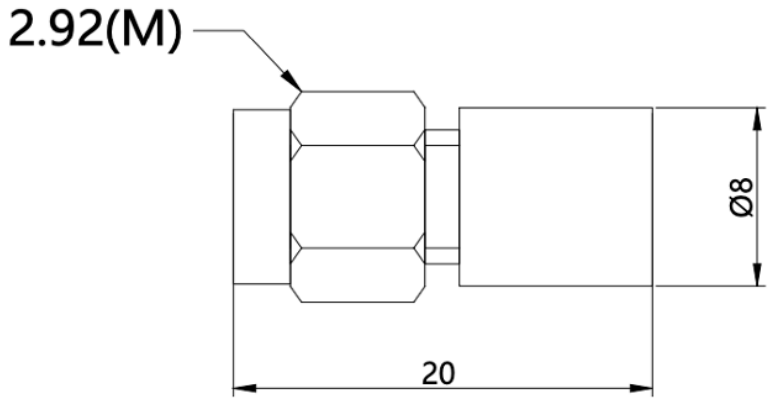

Electrical parameters:
 1 Impedance:50Ω
 2 Frequency:DC~40GHz
 3 VSWR:≤1.25 MAX. DC~ 40 GHz
 4 Power:2W
 5 Temperature range:-55°C~+125°C
 6 Weight:5g

			General tolerance Unless Otherwise Specified	0 Places;±0.2 1 Places;±0.2 2 Places;±0.2 3 Places;±0.2	4 Places;±0.2 Angles; Product:						
Insulator	PTFE	NA				Date	2024/06/17	Drawing Number	DUM292K		
Inside the connector	Beryllium Copper	Gold	Maker			Date		description	2.92mm Male 2Watts DC~40GHz		
Outer of the connectors	Stainless steel	Passivated	Review			Date					
Body Material	Stainless steel	Passivated	Approved			Date					
Description	Material	Plating			Scale:1:5:1	Unit:	mm	RVE	A.0	Page	1 OF 1