


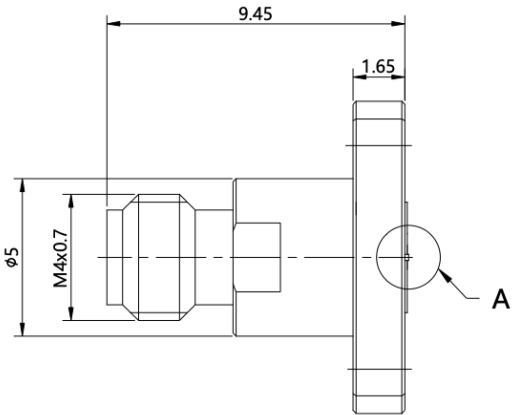
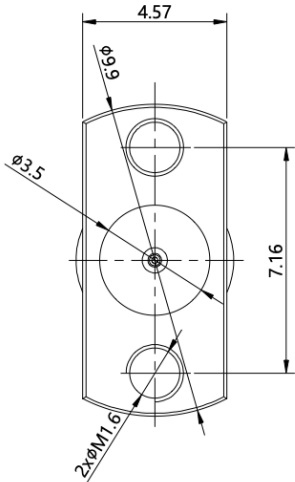
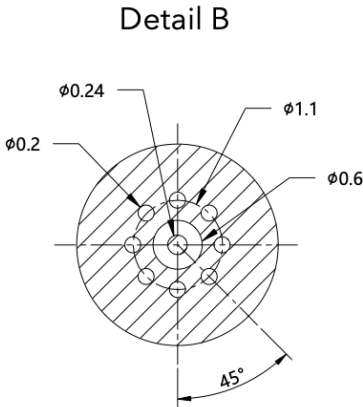
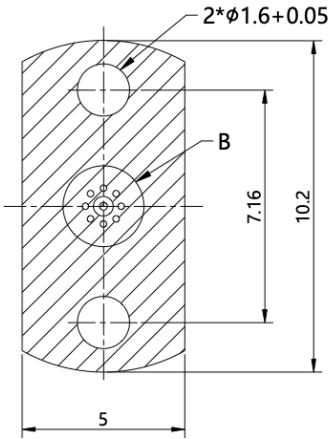



Revisions			
REV:	Description	Date	Approval
A.0			

Recommended PCB Layout



- Electrical parameters:
- 1 Impedance: 50Ω
 - 2 Frequency: DC~110GHz
 - 3 Return loss: ≥15 dB
 - 4 Dielectric withstand voltage: 500Vrms
 - 5 Insulation resistance: 5000MΩ



Screw	Stainless steel	Passivated	General tolerance Unless Otherwise Specified		0 Places;±0.2	4 Places;±0.2	PERFORMANCE  INTERCONNECT			
					1 Places;±0.2	Angles;				
					2 Places;±0.2	Product:				
					3 Places;±0.2					
Dielectric	PEI	NA	Maker	W.W.	Date	2023/04/25	Drawing Number	ART10F00-006		
Outer conductor	Stainless steel	Passivated	Review		Date		description	1.0mm Female, Straight PCB Connector		
Center conductor	Beryllium Copper	Gold	Approved		Date					
Description	Material	Plating			Scale:1:5:1	Unit:	mm	RVE	A.0	Page